


UCS

MiniCentrali Piatte in Doppio Pannello

Mini Air Handling Units Slim in Double Skin



(Max 150 Pa)

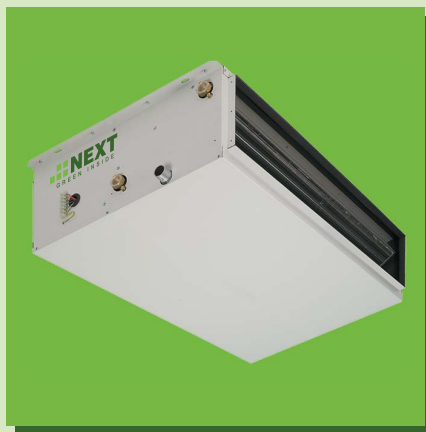

Taglia - Size	UCS	10	20	30	40	50	60	70	80	90
Pot. Frigo totale - Total cooling cap.	kW	7,00	8,51	10,02	12,00	14,55	17,06	18,96	22,21	27,03
Potenza Termica - Heating capacity	kW	15,60	18,60	19,84	28,40	33,70	35,64	46,22	52,70	57,00
Portata aria - Air flow	m³/h	1.343	1.506	1.446	2.725	2.943	2.834	4.255	4.424	4.339
Livello sonoro - Sound level (V1,3,5)	dB(A)	45-41-33	45-41-33	45-41-33	46-39-28	46-39-28	46-39-28	51-48-41	51-48-41	51-48-41
Pot. Frigo totale - Total cooling cap.	kW	7,32	8,78	10,37	12,34	14,81	17,54	18,13	21,46	26,06
Potenza Termica - Heating capacity	kW	16,34	19,21	20,56	29,24	34,34	36,69	44,09	50,84	54,86
Portata aria - Air flow	m³/h	1.415	1.562	1.503	2.816	3.006	2.925	4.036	4.248	4.163
Livello sonoro - Sound level (10V,6V,2V)	dB(A)	48-42-26	48-42-26	48-42-26	48-40-20	48-40-20	48-40-20	52-44-23	52-44-23	52-44-23

Prestazioni Nominali - Nominal Performances



Taglia - Size	UCS	11	21	41	51	71	81
Pot. Frigo totale - Total cooling cap.	kW	6,88	8,37	11,80	14,30	18,88	21,83
Potenza Termica - Heating capacity	kW	7,59	8,10	13,78	14,47	20,64	20,61
Portata aria - Air flow	m³/h	1.316	1.476	2.671	2.884	4.234	4.335
Livello sonoro - Sound level (V1,3,5)	dB(A)	45-41-33	45-41-33	46-39-28	46-39-28	51-48-41	51-48-41
Pot. Frigo totale - Total cooling cap.	kW	7,19	8,63	12,13	14,56	17,82	21,09
Potenza Termica - Heating capacity	kW	7,87	8,31	14,10	14,68	19,69	20,04
Portata aria - Air flow	m³/h	1.387	1.531	2.760	2.946	3.955	4.163
Livello sonoro - Sound level (10V,6V,2V)	dB(A)	48-42-26	48-42-26	48-40-20	48-40-20	52-44-23	52-44-23

Prestazioni Nominali - Nominal Performances

UCS è la nostra linea di Minicentrali trattamento aria Piatte, a sezioni componibili, con spessore costante per tutte le taglie.

Una soluzione vincente: lo spessore estremamente ridotto, il design pulito ed una intelligente gestione degli accessori conferiscono al prodotto funzionalità e flessibilità, rendendolo facilmente integrabile in tutte quelle applicazioni in cui è prevista una canalizzazione con prevalenza media (Max 150Pa).

- Ventilatori a basso numero di giri, estremamente silenziosi
- Disponibili con motorizzazione AC~230V-Monofase ed EC~230V-Brushless
- A richiesta unità con spessore ridotto (sia con ventilatore AC che EC)
- 3 tipi di casse portanti semplice e doppio pannello (Z-P-K)
- Attacchi idraulici a Sinistra o a Destra (a richiesta, senza sovrapprezzo) + reversibilità in cantiere
- Ampia gamma di modelli ed accessori forniti montati e collaudati in fabbrica per garantire semplicità e minimi tempi di installazione

UCS is our Mini Air handling units line with modular sections: Slim and with fixed thickness for all different sizes.

A very successful solution: the very reduced thickness, the clean design, together with a very smart accessories range, are giving to the product high functionality and high flexibility, making the product suitable to be installed where medium static pressure is required (Max 150Pa).

- Fan with low revolutions number, superlative silent
- Available with AC~230V-single-phase and EC~230V-Brushless motorizations
- On request units with reduced height (both in the AC and EC motor)
- 3 main casing types single and double skin panel (Z-P-K)
- Left or Right hydraulic connections (on request, without extra price) + on site reversibility
- Wide variety of models and accessories supplied mounted and tested at the factory to guarantee simplicity and minimum installation times